



MODEL BSR23-HC

BOTTOM MOUNT REACH-IN REFRIGERATOR

Sleek and durable cooling solution for your food and beverages.



Conforms to NSF/ANSI 7(ETL)



Stainless steel cabinet construction

Stainless steel interior and exterior (galvanized steel back & bottom).



Temperature range between 33°F ~ 39°F

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290)

Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.



Visual and audible door open alarm

Alarm sounds when doors are not completely closed to protect against food spoilage



PARTS & LABOR



COMPRESSORS


Blue Air has right to change specifications without further notice.

Cabinet construction


- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Epoxy coated wire shelves with adjustable shelving height.
- 4 shelves per compartment.
- Four 4" Diameter swivel casters with front brakes standard.

Refrigeration

- Self-contained system, bottom mounted compressor. Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Bottom mounted condensation pan.
- Designed to prevent water overflow and increase ventilation.
- Innovative hot gas frame heating system reduces condensation and increases energy.

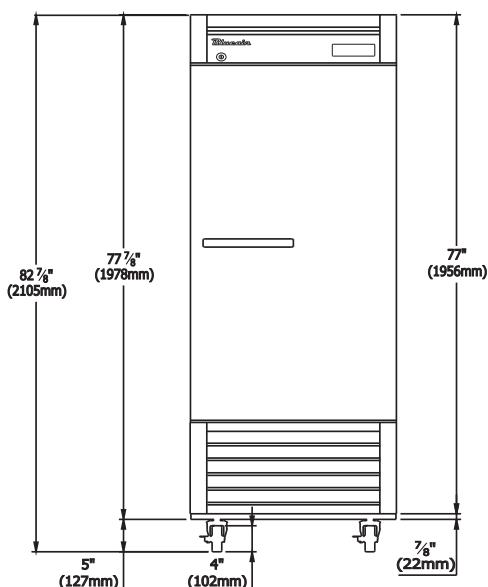

Side view

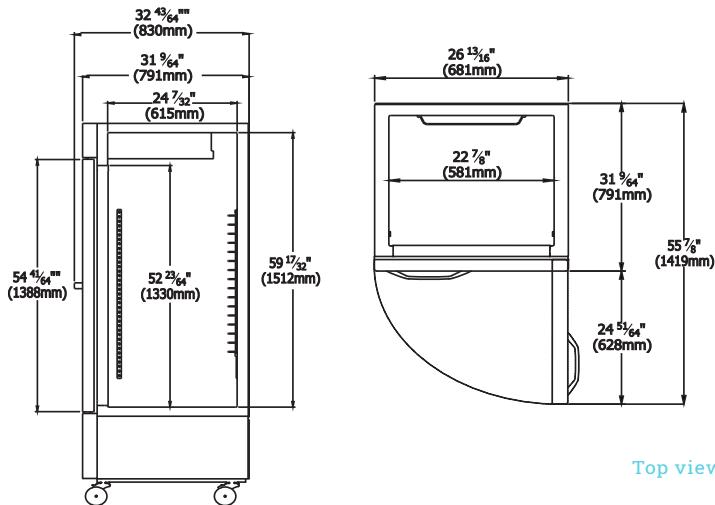

Top view

MODEL BSR23-HC

BOTTOM MOUNT REACH-IN REFRIGERATOR

Exterior Dimensions (inches/mm)

L 26 13/16" 681mm	D 31 9/64" 791mm	H 82 7/8" 2105mm
-------------------------	------------------------	------------------------

Weight (lbs/kg)

Net Weight 238 lbs 108 kg	Ship Weight 269 lbs 122 kg
---------------------------------	----------------------------------

Doors

- Self-closing doors (doors close at 90° or less)
- Automatic hold open door feature at 110°.
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.
- Doors built with pressure and with pressure relievers to eliminate vacuum pressure.
- Standard door locks.

Design & Features

- Self-diagnostic digital temperature control & monitor system.
- Digital display allows for easy monitoring.
- Digital controls include manual defrost for easy maintenance.
- Rounded corner design gives a stylish appearance and reduces chances of injury.

Optional Features & Accessories

- 2.5" diameter casters available.
- 6" adjustable legs available.
- Additional shelves are available.
- Left hinged door available.

Doors	1
Capacity Cu.Ft.	23
Shelves	4
Refrigerant	R-290
Temperature Range	33°F ~ 39°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with molded plug
Lighting	LED Interior lighting
HP	1/4
Voltage	115V/60Hz
Amps	2.0
NEMA Config.	NEMA 5-15

• This product may expose you to chemicals including Diisobutyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.



• Ce produit peut vous exposer à des agents chimiques incluant le Diisobutyl Phthalate(DINP), reconnu par l'Etat de Californie comme causant le cancer. Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.



blueairfse.com



orders@blueairfse.com

223 W. Rosecrans Ave., CA 90248
T: 310-808-01029 W. Shelton Terrace #A, Hillside, NJ 07205
T: 470.625.01827025 Amwiler Industrial Drive, Suite A, Atlanta GA
T: 908-688-0970